

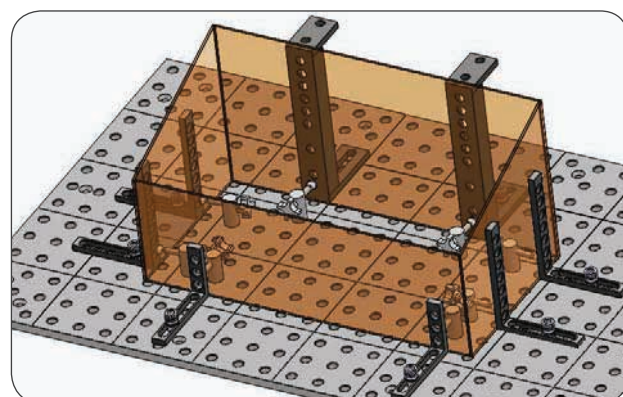
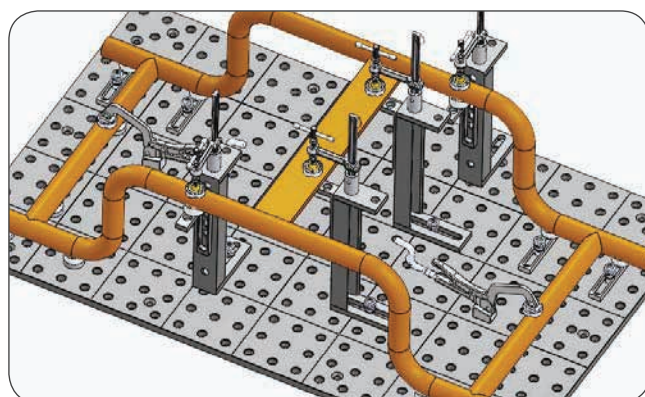


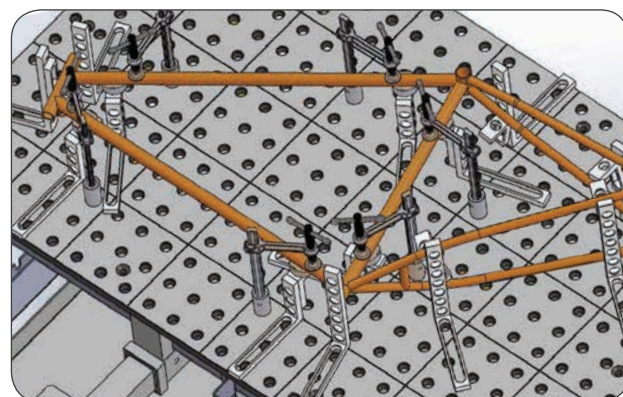


NEW
PRODUCT
2017

Applications

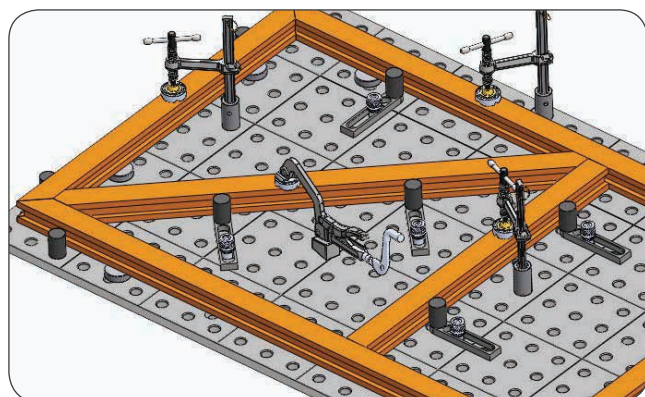

Optional Accessories

The Rhino Cart™ tabletop is compatible with the BuildPro® Tabletop! Choose from the clamps and components featured in both product lines: Rhino-Cart.com and BuildProTables.com.




Universal Hitch Mount
TXH8020




"Third Hand" Modular Clamps
HAS40




Round Stock Pliers with V-Pad
PG637V



Magnetic Tool Bar
TCX104



Flush Mount Ball Lock Bolts
T65020



Adjustable JointMaster Clamps
PA634




Right Angle Brackets
T60310 & 320



Econo Stop & Clamping Squares
T60334

*Application example only.



StrongHandTools

RHINO CART

MOBILE FIXTURING STATION

Charge right through your most challenging projects!

The Rhino Cart Mobile Fixturing Station is a turnkey system for fixturing and clamping in welding and fabrication.

Clamp and fixture at any point on the reversible, flat, nitrided (heat treated) 1,200 x 750 mm tabletop for accuracy in all of your setups.

Accurately fit-up and hold workpieces for tacking and welding with the Rhino Cart package, including: The Rhino Cart Welding Table + 66 pc. Fixture Kit.

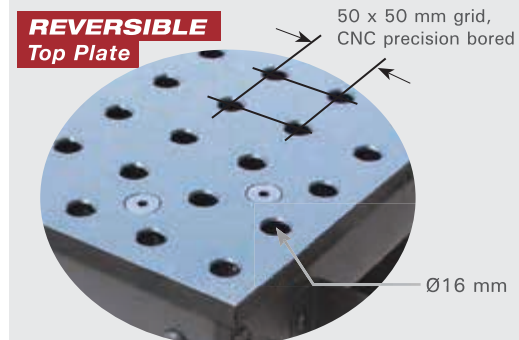


Table + Fixture Kit

ALL-IN-ONE

Mobility & Storage

(Yellow bins are optional. Kit content may differ from image.)



REVERSIBLE
Top Plate

50 x 50 mm grid,
CNC precision bored


Ø16 mm

16 mm thick steel plate reversible tabletop with nitrided black oxide protective finish for wear, rust, and weld spatter resistance. Accurately position parts in CNC precision bored 16 mm dia. holes in 50 x 50 mm spacing pattern.

Rhino Package Part No.:	TDQ612075-K1
Package Includes:	Rhino Cart + 66 pc. Fixture Kit
Tabletop Size:	1,200 x 750 mm
Tabletop Thickness:	16 mm
Hole Diameter:	16 mm
Grid Pattern:	50 x 50 mm
Table Height:	910 mm
Static Loading Capacity:	700 kg
Package Net Weight:	195 kg
Tabletop Life:	Nitrided and black oxide table plate is reversible . Weld spatter, rust and scratch resistant.





Quickly clamp and fixture at any point on the surface. Accurately setup stock for each new project.




Locking casters + leveling feet for mobile or stationary use.




Rhino shelves, racks, and peg-board keep your fixturing tools organized and within easy reach!

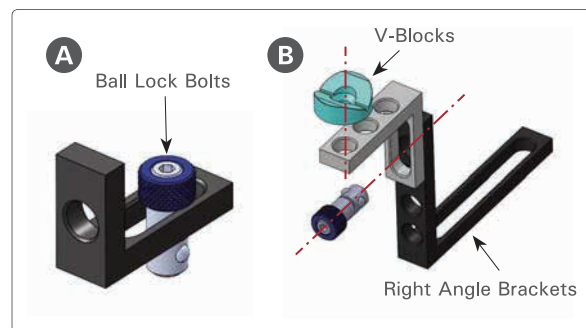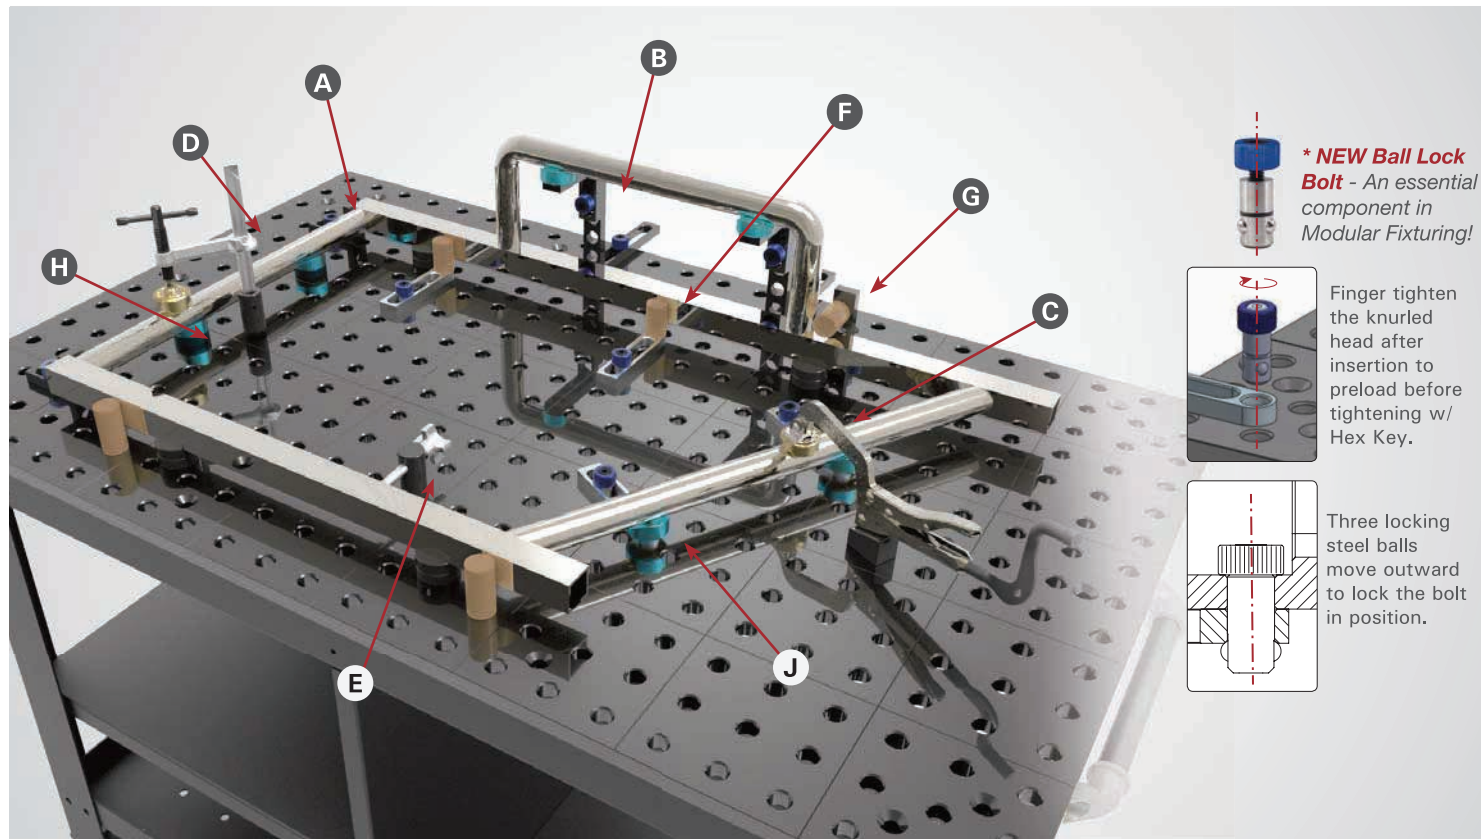


Stop and locate parts. Stack Right Angle Brackets to elevate and hold round parts.

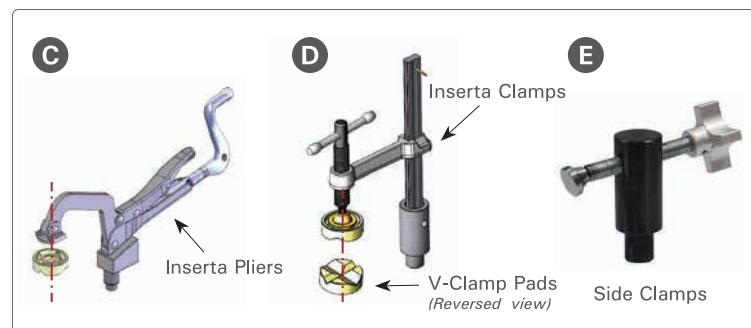

Quick hold-down clamping of flat, square, angled or round parts. Hold, stop, or locate parts using horizontal clamping force.

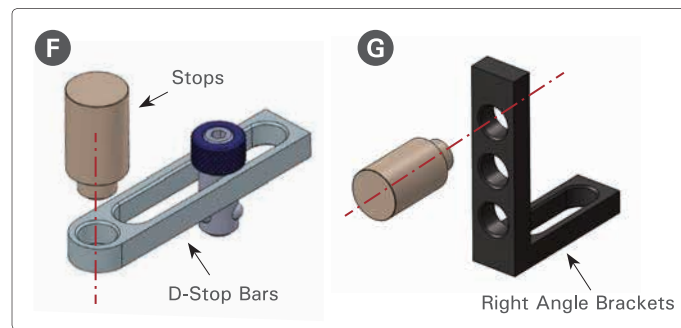

Stop, locate, and position parts.

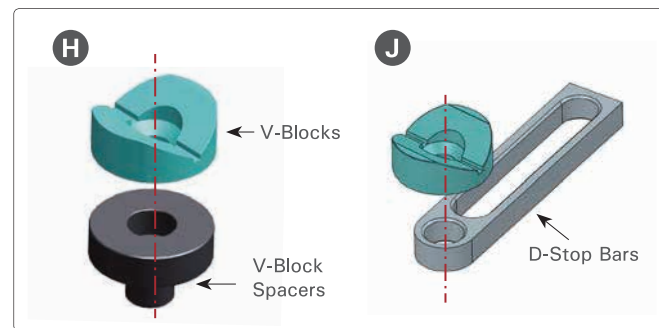

Elevate and hold round parts.

	Part No.	Products	Function	Description	Weight (kg)	TDQ612075-K1 includes: (pc.)
1	TDQ612075			Welding Table, 1,200 x 750 mm, 910 mm height, 16 mm thickness, 16 mm hole, 50 x 50 mm grid pattern, Nitrided Finishing Tabletop, Adjustment Height Range by Leveling Pad from 0 - 50 mm, 680 kg static loading capacity.	185	1
2	T65055		Locate / Lock	Ball Lock Bolt, Adjustable range: 24 mm ~ 28 mm, Connecting tables to accessories, and accessories to accessories.	0.1	10
3	T64201			Locating Pin goes into 16 mm holes, no locking	0.1	2
4	PT07K		Clamp	Inserta Pliers, 60 mm opening, Max. 50 mm reach	0.3	2
5	PT09K			Inserta Pliers, 85 mm opening, Max. 75 mm reach	0.4	2
6	UDN6150			Inserta Clamp, 150 mm opening, 83 mm reach, 16 x 8 mm (D Rail), T-Handle	0.5	2
7	T64217			Magnetic Top V pads for Inserta Pliers and Inserta Clamps	0.1	2
8	TCX6210			Side Clamp, 38 mm stroke	0.3	2
9	T64203		Locate	Stop, Ø 25 x 38 mm	0.2	4
10	T64205			Stop, Ø 25 x 50 mm	0.2	4
11	T64216		Locate / Support	V-Block, Ø 40 x 23 mm	0.1	8
12	T64211			V-Block Spacer, Ø 40 x 27 mm H	0.1	4
13	T60630		Stop / Extend	D-Stop Bar, 120 x 25 x 11.5 mm	0.1	8
14	T50737		Spacer	Magnetic Rest Button, Ø 40 x 11.5 mm	0.1	12
15	T60304		Stop / Support	Right Angle Bracket, 41 x 91 x 30 mm	0.2	2
16	T60305			Right Angle Bracket, 91 x 91 x 30 mm	0.2	2